

SE3SL E6VCP

3" 'S' SERIES

SELF-PRIMING COMMERCIAL DUTY PUMP

BULLETIN
PP-637D
March 2024

PACER



SE3SL E6VCP


PACER

Pacer Pump Features:

- Corrosion resistant glass reinforced polyester.
- EPDM elastomers are standard, Buna-N and Viton® are optional.
- Maximum flow to 280 U.S. GPM.
- Maximum TDH to 120 feet.
- Suction lift to 25 feet.
- 2 or 3" NPT ports, BSP optional.
- Double flush volute with built-in check valve.
- Lightweight and portable with molded carry handle and available with optional roll cage.
- Shaft seal is stainless steel with carbon and ceramic faces, EPDM fitted.

PERFORMANCE CURVE

PACER® PUMPS

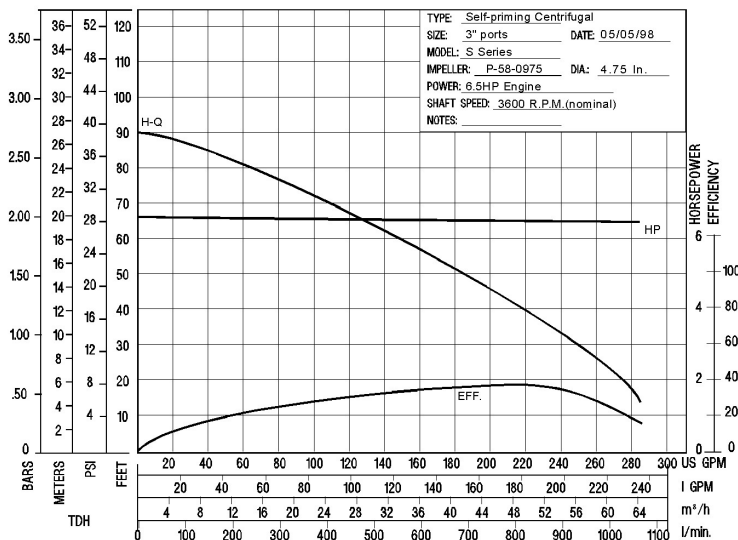

Vanguard Engine Features:

- Briggs & Stratton commercial duty 6.5 hp engine.
- 3 year commercial warranty on engine through manufacturer.
- Compact overhead valve design.
- Dual ball bearings.
- Cast iron cylinder sleeve.
- High capacity air cleaner.
- Metal fuel tank with 4 liter capacity.
- Run Sense low oil system.
- Mechanical governor.
- Fuel shut-off valve with sediment bowl.
- Simultaneous fuel/ignition shut-off protects the engine from oil/fuel dilution during transport.
- Electric start option available.

PUMP SPECIFICATIONS

CURVE	MODEL	PORT SIZE	MAX. FLOW	MAX. TDH	ENGINE	WEIGHT
S	SE3SL E6VCP	3"	280 GPM	83 ft.	Briggs & Stratton Vanguard 6.5HP OHV engine	55 lbs.

PACER

Division of ASM Industries, Inc.

41 Industrial Circle
Lancaster PA 17601

email: sales@pacerpumps.com

www.pacerpumps.com

Phone: 717-925-8240

Toll Free: 800-233-3861

FAX: 717-925-8242

